

CLI Commander Plugin

Plugin Information


View CLI Commander [on the plugin site](#) for more information.

CLI Commander Plugin

Run [CLI commands](#) from Jenkins web UI.

What? Why?

While some operations are easy to perform from UI, other are easier to do using CLI commands. Users often decide not to use Jenkins CLI as the setup is not trivial, especially when authentication is required. CLI Commander Plugin give users instant access to CLI features for experiments or occasional use.

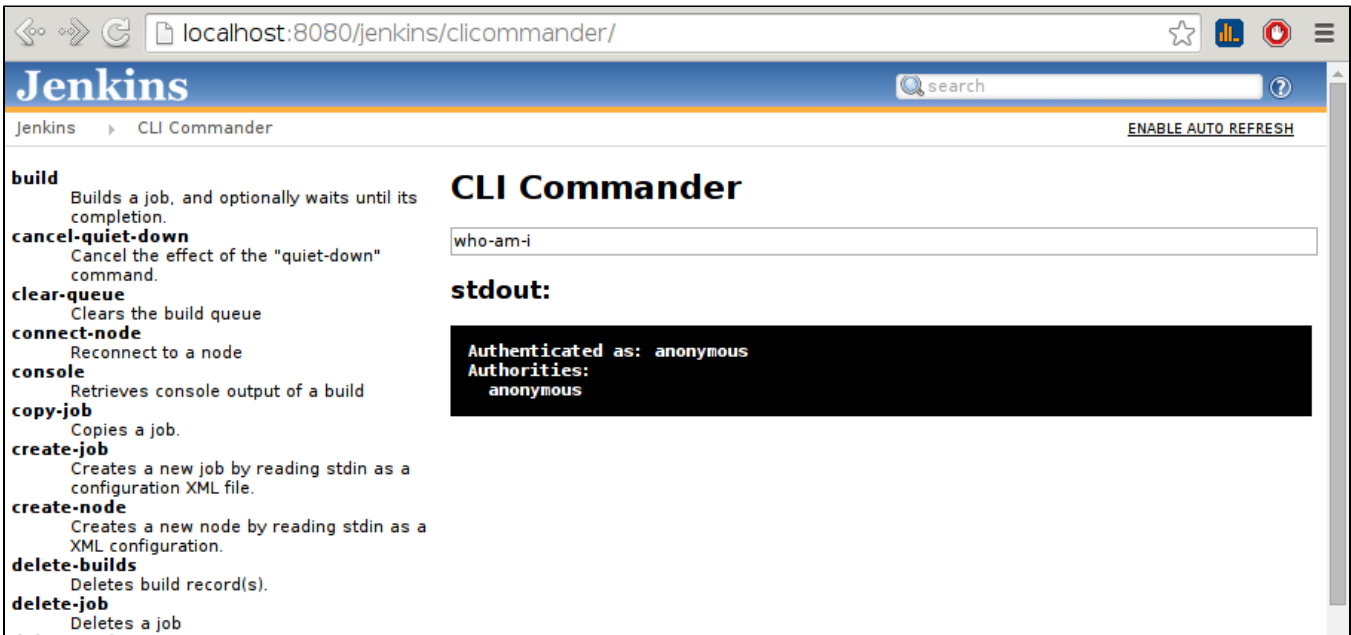

The screenshot shows the Jenkins CLI Commander web interface. The browser address bar displays `localhost:8080/jenkins/clicommander/`. The page title is "Jenkins" and the breadcrumb is "Jenkins > CLI Commander". A search bar is visible in the top right. The main content area is titled "CLI Commander" and features a list of commands on the left and a command input field on the right. The command input field contains `who-am-i`. Below the input field, the output is displayed in a black box with white text: `Authenticated as: anonymous` and `Authorities: anonymous`. The list of commands on the left includes: **build** (Builds a job, and optionally waits until its completion.), **cancel-quiet-down** (Cancel the effect of the "quiet-down" command.), **clear-queue** (Clears the build queue), **connect-node** (Reconnect to a node), **console** (Retrieves console output of a build), **copy-job** (Copies a job.), **create-job** (Creates a new job by reading stdin as a configuration XML file.), **create-node** (Creates a new node by reading stdin as a XML configuration.), **delete-builds** (Deletes build record(s).), and **delete-job** (Deletes a job).