

CrossBrowserTesting Plugin

This plugin integrates Jenkins users with Selenium Testing and Screenshot Testing on [CrossBrowserTesting.com](https://crossbrowsertesting.com). [CrossBrowserTesting.com](https://crossbrowsertesting.com) provides cross browser testing of websites, webpages, and web applications on Windows, Macs, and real iPhones, iPads, and Android Phones and Tablets.

Plugin Information

View [CrossBrowserTesting.com](https://crossbrowsertesting.com) on the [plugin site](#) for more information.

Features

1. Running Selenium Scripts on [CrossBrowserTesting.com](https://crossbrowsertesting.com)
2. Running Automated Screenshot Testing on [CrossBrowserTesting.com](https://crossbrowsertesting.com)
3. Automated Starting and Stopping of the [CrossBrowserTesting.com](https://crossbrowsertesting.com) NodeJS local tunnel to test local and development webpages behind your firewall (embedded and locally installed)
4. Use named local tunnels
5. Enable Test Views with links to download Screenshots for Screenshot Tests, and view videos and packet captures for Selenium scripts
6. Use different API Credentials for each build
7. Embedded local tunnels
8. Supports Jenkins Pipeline
9. Use login profiles or selenium scripts for Automated Screenshot Testing

Installation

[via the interface](#)

1. Go to your installation's management screen.
2. Click **Manage Plugins**.
3. Click the **Available** tab.
4. Find the **CrossBrowserTesting.com Plugin** and select the checkbox.
5. then click either **Install without restart** or **Download now and install after restart**.

[by hand\(not recommended\)](#)

1. Download [CrossBrowserTesting.hpi](https://crossbrowsertesting.com).
2. Save the downloaded .hpi file into your ``${JENKINS_HOME}/plugins`` directory.
3. Restart Jenkins.

Configuration

[Environment Variables](#)

The CrossBrowserTesting.com Jenkins Plugin passes your build step information to your Selenium scripts as environment variables. The exact syntax will vary depending on your scripting language.

Variable	Description
CBT_USERNAME	the username used on CrossBrowserTesting.com for Selenium Testing
CBT_AUTHKEY	the apikey used on CrossBrowserTesting.com for Selenium Testing
CBT_BUILD_NAME	the Jenkins Project's name
CBT_BUILD_NUMBER	the Jenkins Project's current build number
CBT_OPERATING_SYSTEM	the apiname of the selected Operating System
CBT_BROWSER	the apiname of the selected Browser
CBT_RESOLUTION	the name of the selected Screen Resolution
CBT_BROWSERNAME	the browser name without the version (only needed for Javascript Selenium Tests)
CBT_BROWSERS	an array of JSON objects containing the "operating_system", "browser", "resolution, and "browserName" of each configuration specified

See the examples directory for a few language specific sample scripts.


Saving Your CrossBrowserTesting.com API Credentials

1. Go to your installation's management screen.
2. Click **Configure System**.
3. Find the section labeled **CrossBrowserTesting.com**.
4. Click **Add**
5. Select **Jenkins** as the "Jenkins Credentials Provider"
6. Select **Crossbrowseresting.com** as the "Kind"
7. Enter your CrossBrowserTesting.com Username and API Key information. You can find your api key [here](#) (must be logged in)
8. Test the credentials using the **Test Credentials** button
9. Click **Add**.
10. Select the credentials on the "configuration page"
11. Optional: You can also create and select credentials for each build within the build configuration page.

Build/Configure

Enable Selenium and Screenshot Views

1. In the CrossBrowserTesting.com **Build Environment**, Select "Enable Test Results Pages"
2. During your build, links on your sidebar will populate and allow you to interact with the test.
3. You can view and download screenshots for a Screenshots Test
4. You can view videos, snapshots, and network packet captures for Selenium Tests

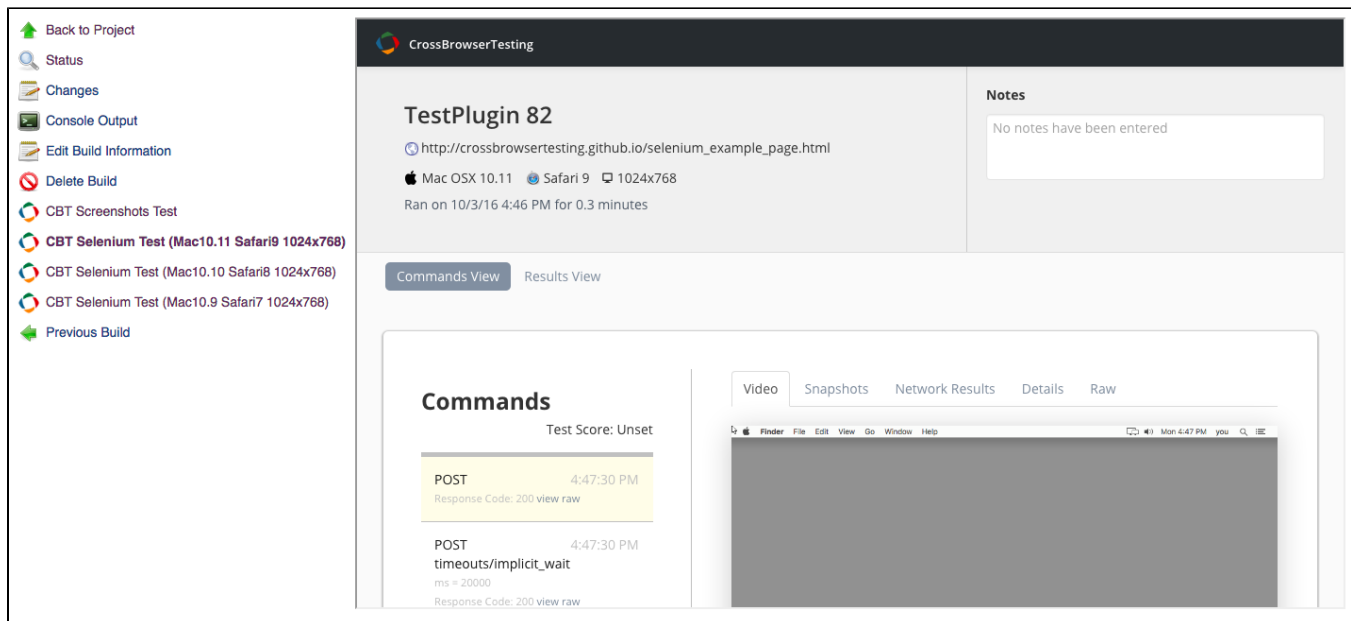

The screenshot displays the Jenkins interface for a build named 'TestPlugin 82'. The left sidebar contains navigation links such as 'Back to Project', 'Status', 'Changes', 'Console Output', 'Edit Build Information', 'Delete Build', 'CBT Screenshots Test', 'CBT Selenium Test (Mac10.11 Safari9 1024x768)', 'CBT Selenium Test (Mac10.10 Safari8 1024x768)', 'CBT Selenium Test (Mac10.9 Safari7 1024x768)', and 'Previous Build'. The main content area shows the test details for 'TestPlugin 82', including the URL 'http://crossbrowseresting.github.io/selenium_example_page.html', the environment 'Mac OSX 10.11 Safari 9 1024x768', and the execution time 'Ran on 10/3/16 4:46 PM for 0.3 minutes'. Below this, there are tabs for 'Commands View' and 'Results View'. The 'Commands View' shows two POST requests with response codes of 200. The 'Results View' shows a video player with a dark screen, and tabs for 'Video', 'Snapshots', 'Network Results', 'Details', and 'Raw'.

Build Environment

1. Configure your Jenkins Project.
2. In **Build Environment**, Check the box next to **CrossBrowserTesting.com**
3. For Screenshot Tests: Pick a BrowserList and enter a URL (you must have you API credentials saved for the browserlist to populate). **You can add multiple Screenshots Tests by clicking "Add a Screenshots Test"**
4. For Selenium Tests: Add the **Operating System, Browser, and Screen Resolution** that you want to run a Selenium Test on. **You can add multiple configurations by clicking "Add a Selenium Tests"**
5. Optional: Check **Use Local Tunnel** to run tests on webpages behind your firewall. The **CBT NodeJS Tunnel** is embedded into the plugin and does not need to be install on the Jenkins Server.
 - a. To use a named tunnel, enter the "Tunnel Name" in the advanced section.
 - b. If you prefer not to use the embedded local tunnel and want to use the local tunnel installed on your system, you can specify the path to the local tunnel binary in the advanced section.
6. For CBT Credentials: Select the credentials to run the tests with.

Execute a Selenium Test

1. Execute a Selenium Test just as normally would with Jenkins.
2. For example, if you were running a script written in python on a Unix machine, within the **Build** section, select **Add Build Step** and **Execute Shell** (if you have the Python Plugin installed you can use it instead).
3. Enter the command to run your script ie. "python your_selenium_script.py"
4. Click **Save**
5. Click **Build Now** to build the project. Output from the tests will be displayed in **Console Output** for the build.

Pipeline Configuration

As of version 2.3, the plugin supports Jenkins Pipeline. Here's an example of a pipeline script:

pipeline example

```
cbt(credentialsId: 'your_credential_id', useLocalTunnel: true, useTestResults: true) {  
  cbtScreenshotsTest browserList: 'Your BrowserList', url: 'http://yourawesomewebsite.com'  
  cbtSeleniumTest(browser: 'Safari10', operatingSystem: 'Mac10.12', resolution: '1024x768') {  
    sh 'python your_selenium_script.py'  
  }  
}
```